

RENTAL PACKAGE DESICCANT DEHUMIDIFIER OCD-5000

PRODUCT FEATURES

- Main Power Phase Monitors
- 30% Inlet Air Filters
- Round Duct Collars
- 12 inches External Static Pressure
- Non-rusting Aluminum Construction
- Lightweight/Small Footprint
- Simple, Reliable Operation

APPLICATIONS


- Mold/Fungus Prevention
- Surface Preparation and Coating
- Restoration Drying
- Corrosion Prevention
- Electronics Protection
- Power Plant Lay-Up
- Pharmaceutical
- Candy manufacturing

OPERATING DATA

Dehumidifier	Model Process Air Flow Reactivation Heat Source Total Static Available	OCD-5000 5000 CFM 99kW electric 12 inch WC
Dimensions	Length Width Height Weight	12' 11.5" 6'6" 6' 3,200 lbs
Electric	Volts Phases Hz FLA	480 3 60 140 (175 amp breaker)
Included Options	Transportation Dual Reactivation Connection type Outlet Size	Castors and fork pockets LP gas and electric Camlock 19.75"



DIMENSIONS

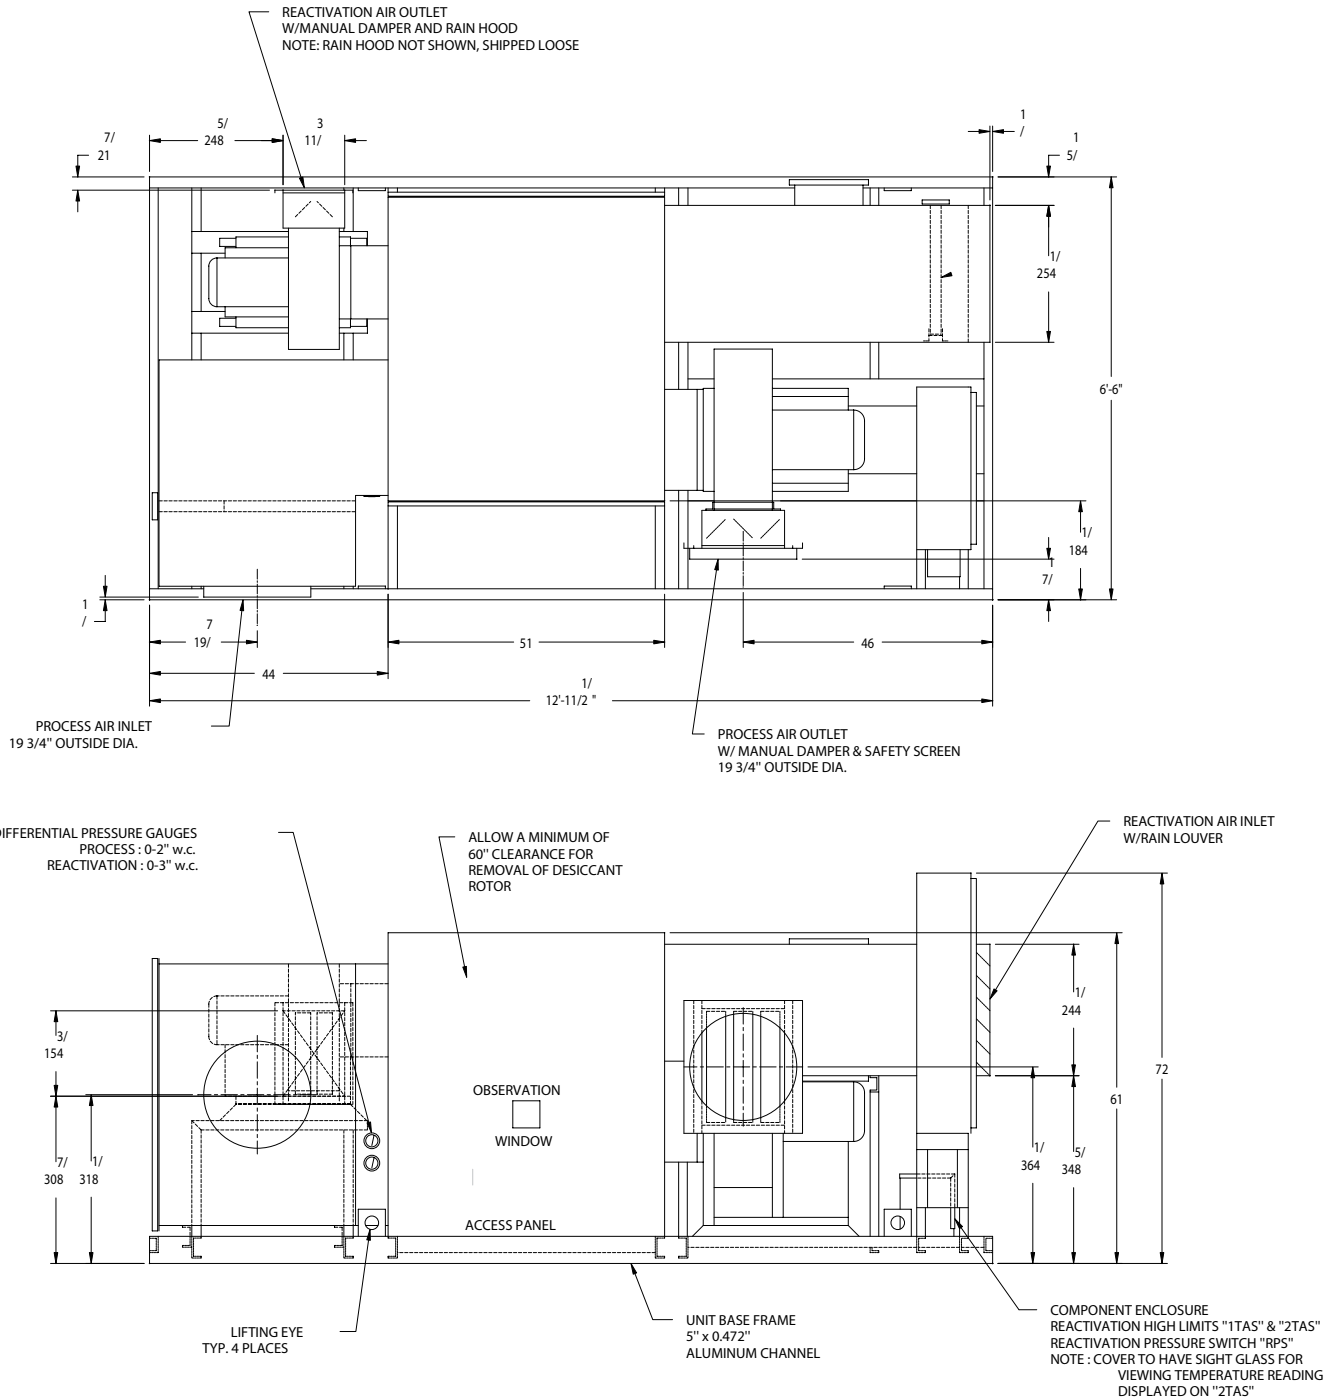

Consult your Caterpillar representative for more details.

www.CAT-ElectricPower.com

©2003 Caterpillar

All rights reserved.

Printed in U.S.A.

Materials and specifications are subject to change without notice.

